




The Arecont Vision 6 inch Indoor/Outdoor Dome is a high quality environmental housing designed for the AV8180 and AV8360 Panoramic 8 megapixel IP video cameras.

Combining this 6" housing with the superior imaging of an AV camera provides the perfect solution for applications in which additional protections from the elements is required. Heater blower and sunshade are also available for extreme environments.

- IP66 Rating
- Indoor or Outdoor Applications
- Wall Mount/Pendant Mount
- Simple Installation
- Easy Access to Camera


6 Inch Dome



EXCELLENT PROTECTION: Heavy duty enclosure features an IP66 rating for applications in harsh environments.

FULL VIEW IN ALL DIRECTIONS: Use the AV8180 or AV8360 panoramic cameras to ensure outstanding observation with excellent color sensitivity and high resolution.

EASY INSTALLATION: Easy installation and superior design, perfect for either indoor or outdoor applications.

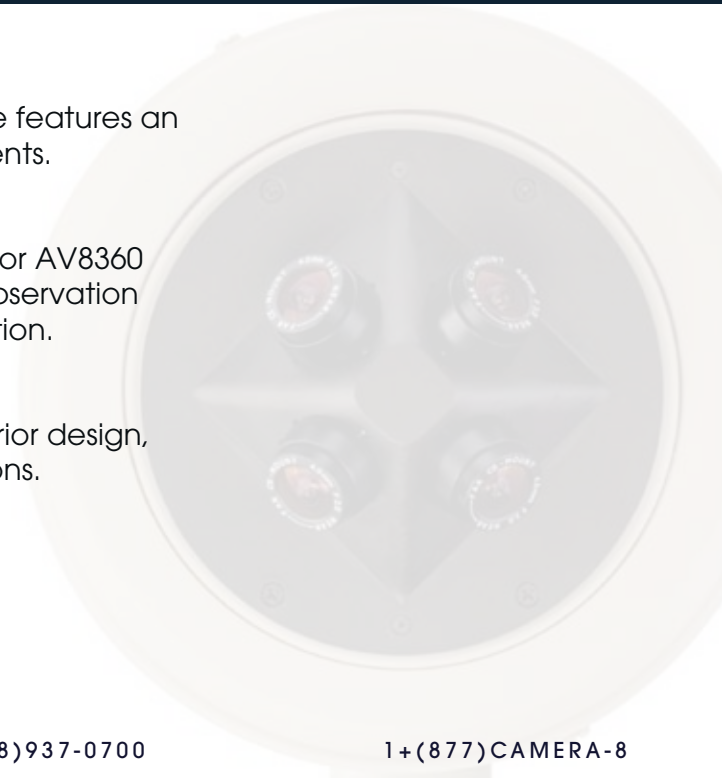

detailmatters
www.arecontvision.com

MODEL NUMBERS

DOME6-I-C:

Indoor 6" vandal resistant dome (AV8XXX)
Top mount version

DOME6-I-W:

Indoor 6" vandal resistant dome (AV8XXX)
Wall mount version

DOME6-O-CH:

Outdoor 6" vandal resistant dome (AV8XXX)
w/heater blower, sunshade, top mount, IP66

DOME6-O-WH:

Outdoor 6" vandal resistant dome (AV8XXX)
w/heater blower, sunshade, wall mount, IP66

MECHANICAL

Housing material:

Aluminum

Dome Cover Protection:

Vandal resistant polycarbonate

Color

Gray

Dome Diameter:

6 in (same for indoor & outdoor)

Housing Height:

Indoor: 6.3in (160 mm)
Outdoor: 6.4in (162 mm)

Housing Diameter:

Indoor: 8.6in (218 mm)
Outdoor: 9.3in (236 mm)

Weight w/o camera:

Indoor housing: 570 g (1.26 lbs)
Outdoor housing: 590 g (1.30 lbs)
Pendant bracket: 680 g (1.50 lbs)
Wall mount bracket: 980 g (2.16 lbs)

ELECTRICAL

Power Supply:

Indoor: Not Applicable
Outdoor: 24 VAC Heater/ blower .8A

Power Consumption:

Indoor: Not applicable
Outdoor: 20 Watts maximum

ENVIRONMENTAL

Operating Temperature:

Indoor: 0°C to 50°C
Outdoor: - 40 °C to 50 °C

Humidity:

0 to 95 % relative, non-condensing

Enclosure Protection:

Indoor: Not Applicable
Outdoor: IP66 Outdoor Protection Grade

Fan:

Indoor: Not Applicable
Outdoor: Fan Operates Continuously

Heater:

Indoor: Not Applicable
Outdoor: Heater auto starts when temperature drops below to -5 °C

