

Intellex® LT

Powerful digital video management system designed for smaller installations

Features That Make a Difference:

- Multiplex, detect alarms and events, record video, audio and text, and much more
- Set dome presets, patterns and configurations right from the Intellex GUI
- Search for specific clips using video analysis tools and advanced text
- Operate Intellex LT like a virtual matrix via Network Client™ with CCTV keyboard-based camera control¹ and an expanded capacity to stream video simultaneously from multiple cameras
- React faster to potential emergencies with immediate email notification of system events and alarms
- Customize camera views for flexible monitoring
- Respond to events with alarm-triggered dome positioning
- Record higher frame rates per second for certain cameras and assign the remainder to less critical cameras
- Easily export video, audio and text to CD-RW with one click of the mouse
- Store over 9 times more video than MPEG-4 and MJPEG-based systems using patented American Dynamics™ Active Content Compression (ACC) technology
- Connect up to three Extended Storage Modules (ESMs) to expand the local storage capacity
- Use 3rd party applications—such as access control from Software House® and Kantech as well as video forensics, virtual matrix, remote monitoring and more—integrated with Intellex via the powerful application programming interface (API)



Intellex LT delivers the key Intellex features in an economical package, providing the best solution for small retail stores, health care facilities and small offices. It can store more than 900 hours of video and supports as many as five simultaneous Network Client users.

As with the entire suite of Intellex digital video management systems, the user interface is extremely easy to use, no matter what your skill level. Access all operations using one-click buttons, pull-down menus, adjustable sliders and tabbed screens—even draw target areas on-screen using mouse commands. These powerful screens allow quick setup, ease of operation and reconfiguration and they require less time to train new employees.

Most importantly, Intellex LT makes it easy to record, find and share critical video footage. With the powerful IntelleCord® feature, you can save valuable hard drive space by recording only events that trigger an alarm at times that really matter. Just as easily, you can find critical video clips quickly using Smart Search to filter through hours of video. With the click of the mouse, you can view every instance of when someone crossed a perimeter, turned lights on and off, or moved or drove a vehicle in the wrong direction at an inappropriate speed, and more. For motion exception, simply specify the type of motion that you are looking for—speed, direction, size of the moving object—and Intellex LT finds it for you.

Easily save and share video marked with a unique identification “stamp”, which is ideal when you need to provide court-admissible video evidence on CD to the authorities, vendors or other non-security personnel.

(1) Requires v4.0 or higher.

For the ultimate in flexibility, you can host and customize your own website to provide live viewing of Intellex video through a standard browser interface. Multiple clients can access and even control domes remotely through Browser Client, which is available at no charge. If more advanced operations are required, Network Client allows you to remotely configure Intellex, select video segments by time, date or alarm, use Smart Search, view up to 64 simultaneous live video segments and have virtual matrix capability² when used with a CCTV keyboard. Save, annotate and organize recorded video into incident folders to aid with investigations. Export video clips to an .AVI file to play on any Windows®-based PC. Individual images can be enhanced, printed and converted to standard formats. For more information on these and other Intellex tools, such as Intellex Archive Manager and Intellex Policy Manager, please refer to our separate Intellex Management Suite data sheet.

Accessories

ADDSNC40	Network Client v4.0, management/config/ viewing software, single license
ADDSNC40UL	Network Client v4.0, management/config/ viewing software, corporate license
ADDSNCVMK	Network Client Virtual Matrix/Keyboard with MegaPower matrix switcher integration, single license
ADDSNCVMKUL	Network Client Virtual Matrix/Keyboard with MegaPower matrix switcher integration, corporate license
ADDSNCISI	Network Client Snap-In Manager, single license
ADDSNCISUL	Network Client Snap-In Manager, corporate license
ADDSNCISVMK	Network Client Snap-In Manager with Virtual Matrix/ Keyboard and MegaPower matrix switcher integration, single license
ADDSNCISVMKUL	Network Client Snap-In Manager with Virtual Matrix/ Keyboard and MegaPower matrix switcher integration, corporate license
ESM640, ESM1000640 GB or 1,000 GB Extended Storage Module (use up to three per Intellex unit)
DVRM-01	Front rack mount kit ³
UHRM09BNC rack mount extension kit ⁴
RDVSPK01	Speakers
RDVEXP011 to 4 text data port expander
RDVEXP021 to 8 text data port expander
RDVDAT01SCSI external DAT drive ⁵
RDVUPGSCSI01SCSI 3 adapter card
RDVUSB23201USB to RS-232 adapter
ADACSNETUSB CCTV control module w/CBL
RDVUPGFWFireWire® card upgrade kit
RDVUPGM156K modem (PCI) upgrade kit ⁶
ADACKBPC2000Keyboard accessory, keyboard to PC connection kit, for AD2000 series keyboards
ADACKBPCMPCCKeyboard accessory, keyboard to PC connection kit, for MegaPower ControlCenter keyboards

Model Number Configuration

EXAMPLE	BRAND	FAMILY	CHANNELS	CHASSIS	PLATFORM	FEATURES	STORAGE
	AD	D	4 4 = 4 channels 8 = 8 channels 16 = 16 channels	00 00 = Desktop	LT LT	D D = Deluxe P = Premier	016 016 = 160 GB 032 = 320 GB

(2) Requires v4.0 or higher.
(3) 16-channel LT platforms only.
(4) LT desktop chassis only.
(5,6) Includes SCSI interface card.


Product offerings and specifications are subject to change without notice. Actual products may vary from photos. Not all products include all features. Availability varies by region; contact your sales representative. Certain product names mentioned herein may be trade names and/or registered trademarks of other companies.

© 2006 Sensormatic Electronics Corporation. All rights reserved. AD0043-DS-200609-R01-A4-EN

www.americandynamics.net

Basic System Diagram

Intellex LT lets you customize your system. Add PTZ cameras and SpeedDome® Programmable Dome Cameras and operate them with the ADTT16E Touch Tracker® Controller. Display video on a variety of monitors, integrate I/O alarm devices, stream in audio or ASCII text from cash registers. Even add a printer. Need more storage capacity? Install up to three Extended Storage Modules (ESMs) for each Intellex LT or use standard SAN, NAS, or DAS devices with Archive Manager. Want to integrate your video with third party software? The Intellex API provides a powerful yet easy to use set of programming interfaces that enable interoperability with access control and business management software applications.

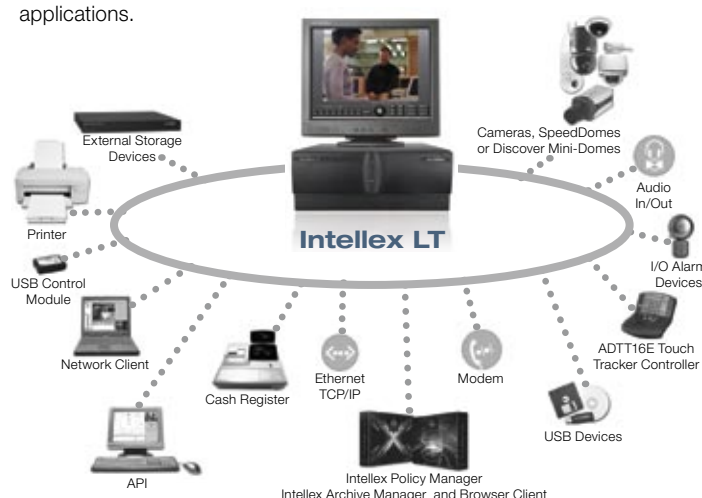

Specifications

Environmental

Operating Temperature	5° to 35°C (41° to 95°F)
Humidity	5% to 95% RH (non-condensing)
Storage Conditions	-10° to 60°C (14° to 140°F)
Maximum Operating Altitude	3,048 m (10,000 ft)

Electrical

Power	100-240 VAC, 50/60 Hz, 3.0/1.5 A
-----------------	----------------------------------

Regulatory

Emissions	FCC 15b, Class B EN55022 (1995) Class A EN61000-3-2 (1995) EN61000-3-3 (1995)
Immunity	EN50130-4 (1996)
Safety	UL 60950-1 EN 60950-1: 2001+A11



tyco / Fire & Security